
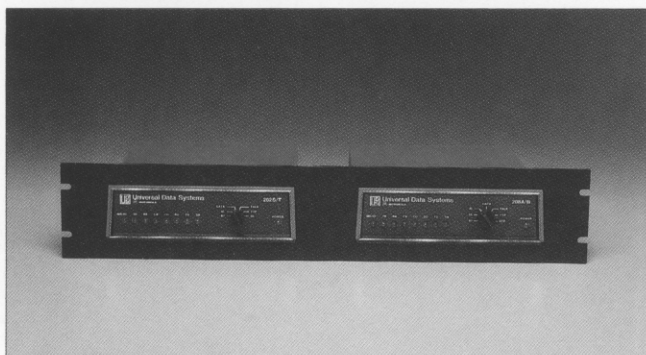
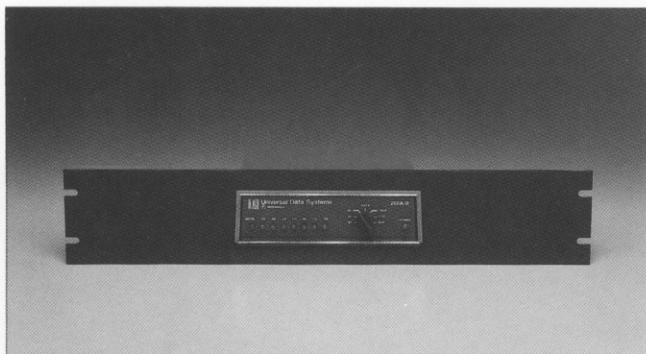
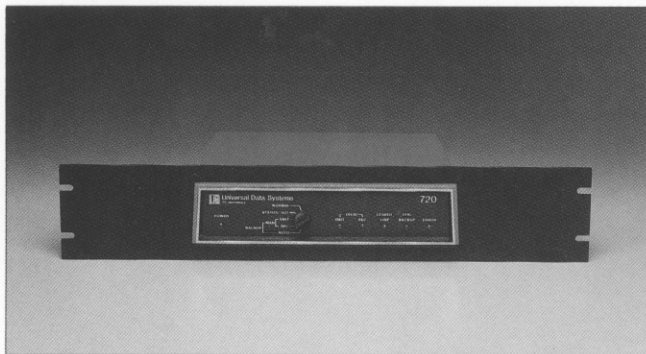


RACK ADAPTERS

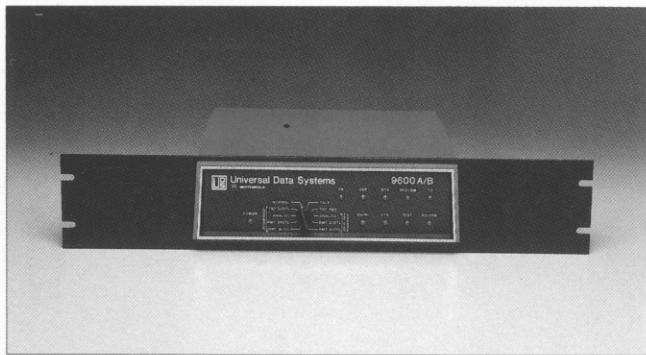

DESCRIPTION

The following rack mount adapters allow UDS modems to be mounted in a standard 19" relay equipment rack. The four modem adapter models include the RM1, RM1L, RM1M, and the RM2M.

The UDS **RM1** rack adapter is 19 inches wide and 3.5 inches high. This adapter holds one UDS modem which is 9.5 inches wide by 10.5 inches long and 2.75 inches high. Current UDS models 103J, 9600, 9600A/B, 9600FP, 14.4 Trellis and many plastic enclosed older UDS modems with these measurements may be placed in the RM1.

The UDS **RM1L** rack adapter is 19" wide and 3.5" high. This adapter holds one UDS modem which is 9.40 inches wide by 10.5 inches long and 2.25 inches high. Current UDS models 108, EC212A/D, EC201C/D, 701, 720, 801A/C and many plastic enclosed older UDS modems with these measurements may be placed in the RM1L.

The UDS **RM1M** rack adapter is 19 inches wide by 3.5 inches high. This adapter holds one UDS modem which measures 7.0 inches wide by 9.6 inches long and 2.25 inches high. Current UDS models available for this rack include: 202S/D, 202S/T, 202S/T-R, 202T, 212A, 212A/D, 201B/C, 201B, 201C, 201C/D, 224A, 224A/D, 208A/B, LDM A/S 9.6, D9.6, and D56.

The UDS **RM2M** rack adapter is 19 inches wide and 3.5 inches high. This adapter holds **two** modems which measure 7.0 inches wide by 9.6 inches long and 2.25 inches high. All units which may be housed in the RM1M may be placed in the RM2M.