

USER MANUAL

MODEL 1080A and
MODEL 1080A-64
**Universal Synchronous &
Asynchronous
Short Range Modems**



An ISO-9001
Certified Company

Part #07M1080A-D
Doc. #072041UD
Revised 6/19/98

(

1.0 WARRANTY INFORMATION

Patton Electronics warrants all Model 1080A Series components to be free from defects, and will—at our option—repair or replace the product should it fail within one year from the first date of shipment.

This warranty is limited to defects in workmanship or materials, and does not cover customer damage, abuse or unauthorized modification. If this product fails or does not perform as warranted, your sole recourse shall be repair or replacement as described above. Under no condition shall **Patton Electronics** be liable for any damages incurred by the use of this product. These damages include, but are not limited to, the following: lost profits, lost savings and incidental or consequential damages arising from the use of or inability to use this product. **Patton Electronics** specifically disclaims all other warranties, expressed or implied, and the installation or use of this product shall be deemed an acceptance of these terms by the user.

1.1 RADIO AND TV INTERFERENCE

The Model 1080A Series generates and uses radio frequency energy, and if not installed and used properly—that is, in strict accordance with the manufacturer's instructions—may cause interference to radio and television reception. The Model 1080A Series has been tested and found to comply with the limits for a Class A computing device in accordance with the specifications in Subpart J of Part 15 of FCC rules, which are designed to provide reasonable protection from such interference in a commercial installation. However, there is no guarantee that interference will not occur in a particular installation. If the Model 1080A Series does cause interference to radio or television reception, which can be determined by disconnecting the RS-232 interface, the user is encouraged to try to correct the interference by one or more of the following measures: moving the computing equipment away from the receiver, re-orienting the receiving antenna and/or plugging the receiving equipment into a different AC outlet (such that the computing equipment and receiver are on different branches).

1.2 CE NOTICE

The CE symbol on your Patton Electronics equipment indicates that it is in compliance with the Electromagnetic Compatibility (EMC) directive and the Low Voltage Directive (LVD) of the Union European (EU). A Certificate of Compliance is available by contacting Patton Technical Support.

1.3 SERVICE

All warranty and non-warranty repairs must be returned freight prepaid and insured to Patton Electronics. All returns must have a Return Materials Authorization number on the outside of the shipping container. This number may be obtained from Patton Electronics Technical Service at:

tel: **(301) 975-1007**;
email: **support@patton.com**; or,
www: **http://www.patton.com**.

NOTE: Packages received without an RMA number will not be accepted.

Patton Electronics' technical staff is also available to answer any questions that might arise concerning the installation or use of your Model 1080A Series. Technical Service hours: **8AM to 5PM EST, Monday through Friday.**

2.0 GENERAL INFORMATION

Thank you for your purchase of this Patton Electronics product. This product has been thoroughly inspected by Patton's qualified technicians. If any questions or problems arise during installation or use of this product, please do not hesitate to contact Patton Electronics Technical Support at (301) 975-1007.

2.1 FEATURES

- Synchronous or asynchronous operation
- **Model 1080A** supports data rates up to 57.6 kbps
- **Model 1080A-64** supports data rates up to 64 kbps
- Two-wire/half duplex or four-wire/full or half duplex
- V.52 & V.54 test modes
- Automatic equalization & gain control
- Anti-streaming timer
- Distances up to 20 miles (32 km)
- Point-to-point or multipoint
- Internal, external or received loopback clocking
- Hardware and software flow control support
- Built-in transformer isolation & high speed surge protection
- External AC power
- Bi-color LED indicators
- Detects broken or inferior cable by lighting error LED

2.2 DESCRIPTION

The Model 1080A Series Universal Short Range Modem operates 2-wire (half duplex) or 4-wire (full or half duplex), in synchronous or asynchronous modes, over unconditioned telephone lines. The Model 1080A supports bit rates up to 57.6 kbps. The Model 1080A-64 supports rates up to 64 kbps. Both operate in synchronous mode between the local and remote modems; when connected to an asynchronous RS-232 device, the Model 1080A Series SRM converts the asynchronous data to synchronous data.

The Model 1080A Series has several features to enhance overall performance: automatic equalization, automatic gain control, anti-streaming timer, transformer isolation to guard against data loss due to ground potential differences, and Silicon Avalanche Diode surge protection to guard against data line transients.

The Model 1080A Series features V.52 compliant bit error rate pattern tests and two V.54 test modes: local analog loopback and remote digital loopback. The operator at the local end may test both local and remote modems, plus the line, in the digital loopback mode. Both RDL and LAL modes can be controlled by a manual switch or via the V.24/RS-232 interface.

3.0 CONFIGURATION OVERVIEW

The Model 1080A Series is fairly simple to install and is ruggedly designed for excellent reliability: just set it and forget it. The following instructions will help you set up and install the Model 1080A or 1080A-64 properly.

3.1 CONFIGURATION SWITCHES

The Model 1080A Series uses a unique set of 24 external mini DIP switches that allow configuration to an extremely wide range of applications. These 24 DIP switches are grouped into three eight-switch sets, and are externally accessible from the underside of the unit (see Figure 1). Since all configuration DIP switches are externally accessible, **there is no need to open the case for configuration.**

The configuration switches allow you to select data rates, clocking methods, V.52 & V.54 tests, word lengths, extended signaling rates, async. or sync. mode, 2- or 4-wire operation, anti-stream control and input impedance. The drawings, text and tables on the following pages describe all switch locations, positions and functions.

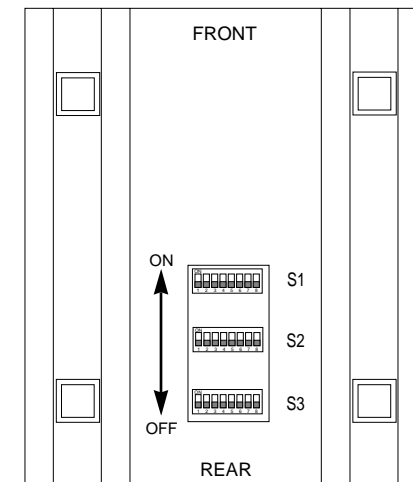


Figure 1. Underside of Model 1080A Series, showing location of DIP switches

Each Model 1080A Series SRM has three sets of eight switches, yielding 24 total DIP switches. The three sets will be referred to as S1, S2 and S3. As Figure 2 shows, the orientation of all DIP switches is the same with respect to “ON” and “OFF” positions.

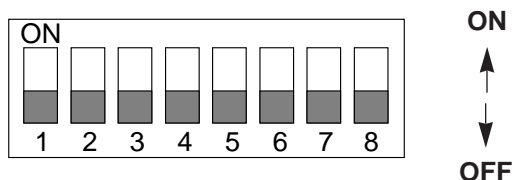


Figure 2. Close-up of DIP switches showing “ON” and “OFF” positions

3.2 CONFIGURATION SWITCH SET “S1”

The DIP switches on S1 set data rate, clock source, async./sync. mode and carrier control method. The default settings are summarized in the table below.

| MODEL 1080A S1 SUMMARY TABLE | | |
|------------------------------|-----------------|---|
| Position | Function | Factory Default |
| S1-1 | Data Rate | On |
| S1-2 | Data Rate | Off |
| S1-3 | Data Rate | Off |
| S1-4 | Data Rate | On |
| | | <div style="display: flex; align-items: center;"> <div style="font-size: 3em; margin-right: 5px;">}</div> <div> 9,600 bps (1080A) or 16,000 bps (1080A-64) </div> </div> |
| S1-5 | Clock Source | On |
| S1-6 | Clock Source | On |
| | | <div style="display: flex; align-items: center;"> <div style="font-size: 3em; margin-right: 5px;">}</div> <div>Internal</div> </div> |
| S1-7 | Async./Sync. | On Async. |
| S1-8 | Carrier Control | Off Constantly On |

Switches S1-1 through S1-4: Data Rate Setting

Switches S1-1 through S1-4 are set in combination to determine the asynchronous and synchronous data rate for the Model 1080A and 1080A-64.

Shown in the tables below are DIP Switch settings for Models 1080A and 1080A-64.

MODEL 1080A DATA RATE SETTINGS

| S1-1 | S1-2 | S1-3 | S1-4 | Setting |
|------|------|------|------|-----------|
| On | On | On | On | 1.2 kbps |
| Off | On | On | On | 1.8 kbps |
| On | Off | On | On | 2.4 kbps |
| Off | Off | On | On | 3.6 kbps |
| On | On | Off | On | 4.8 kbps |
| Off | On | Off | On | 7.2 kbps |
| On | Off | Off | On | 9.6 kbps |
| Off | Off | Off | On | 14.4 kbps |
| On | On | On | Off | 19.2 kbps |
| Off | On | On | Off | 28.8 kbps |
| On | On | Off | Off | 38.4 kbps |
| Off | On | Off | Off | 57.6 kbps |

DATA RATE SETTINGS - MODEL 1080A-64

| S1-1 | S1-2 | S1-3 | S1-4 | Setting |
|------|------|------|------|---------|
| Off | On | Off | On | 16 kbps |
| Off | Off | Off | On | 32 kbps |
| Off | On | On | Off | 64 kbps |

Switches S1-5 and S1-6: Clock Source

Switches S1-5 and S1-6 are set in combination to determine the transmit clock source for the Model 1080A Series.

| S1-5 | S1-6 | Setting |
|------|------|-------------------------|
| On | On | Internal transmit clock |
| Off | On | Receive recover clock |
| On | Off | External transmit clock |

Switch S1-7: Asynchronous/Synchronous Mode

The setting for switch S1-7 determines whether the Model 1080A Series is in asynchronous or synchronous operating mode.

| S1-7 | Setting |
|------|--------------|
| On | Asynchronous |
| Off | Synchronous |

Switch S1-8: Carrier Control Method

The setting for switch S1-8 determines whether the carrier is “constantly on” or “controlled by RTS”. This setting allows for operation in switched carrier, multipoint and/or hardware handshaking applications.

| <u>S1-8</u> | <u>Setting</u> |
|-------------|-------------------|
| Off | Constantly on |
| On | Controlled by RTS |

3.3 CONFIGURATION SWITCH SET “S2”

The DIP switches on S2 set word length, extended signaling rate, RTS/CTS delay, V.52 and V.54 diagnostic test and 2- and 4-wire operation.

| S2 SUMMARY TABLE | | |
|-------------------------|-------------------------|------------------------|
| Position | Function | Factory Default |
| S2-1 | Word Length | Off |
| S2-2 | Word Length | Off } 10 bits |
| S2-3 | Extended Signaling Rate | Off -2.5% to 1% |
| S2-4 | RTS/CTS Delay | On |
| S2-5 | RTS/CTS Delay | On } 7 ms |
| S2-6 | V.52/V.54 Tests | Off Normal Operation |
| S2-7 | 2-Wire/4-Wire | Off (4-Wire) |
| S2-8 | Not Used | N/A |

Switches S2-1 and S2-2: Word Length

Switches S2-1 and S2-2 are set in combination to determine the word length for asynchronous data.

| <u>S2-1</u> | <u>S2-2</u> | <u>Setting</u> |
|-------------|-------------|----------------|
| Off | On | 8 bits |
| On | On | 9 bits |
| Off | Off | 10 bits |
| On | Off | 11 bits |

Switch S2-3: Extended Signaling Rate

The setting for switch S2-3 determines the range of variability the Model 1080A Series “looks for” in asynchronous data rates (i.e., the actual variance from a given frequency level the Model 1080A Series will tolerate).

| <u>S2-3</u> | <u>Setting</u> |
|-------------|----------------|
| Off | -2.5% to +1% |
| On | -2.5% to +2.3% |

Switches S2-4 and S2-5: RTS/CTS Delay

The combined settings for switches S2-4 and S2-5 determine the amount of delay between the time the unit “sees” RTS and when it sends CTS. Options are no delay, 7 ms and 53 ms.

| <u>S2-4</u> | <u>S2-5</u> | <u>Setting</u> |
|-------------|-------------|----------------|
| On | On | 7 ms |
| Off | On | 53 ms |
| On | Off | No delay |
| Off | Off | No delay |

Switch S2-6: V.54 Loopback Test Enable

To reset the V.54 circuit, set switch S2-6 to the “ON” position, then back to the “OFF” position.

| <u>S2-6</u> | <u>Setting</u> |
|-------------|-----------------------|
| Off | V.54 Normal Operation |
| On | V.54 Testing Disabled |

Switch S2-7: 2-Wire/4-Wire Mode Selection

The setting for switch S2-7 determines whether the Model 1080A Series is operating in 2-wire or 4-wire mode.

| <u>S2-7</u> | <u>Setting</u> |
|-------------|------------------------------|
| Off | 4-wire (full or half duplex) |
| On | 2-wire (half duplex only) |

3.4 CONFIGURATION SWITCH SET “S3”

The DIP switches on S3 set the anti-stream control, local loopback enable, remote loopback enable and receive (input) impedance levels for the Model 1080A Series. Factory default positions of Switch S3 are shown in the table below.

| S3 SUMMARY TABLE | | |
|------------------|---------------------|-------------------|
| Position | Function | Factory Default |
| S3-1 | Input Impedance | On |
| S3-2 | Input Impedance | Off |
| S3-3 | Not yet assigned | n/a |
| S3-4 | Mode Selection | On Point to Point |
| S3-5 | Local Loopback | Off Disabled |
| S3-6 | Remote Loopback | Off Disabled |
| S3-7 | Anti-stream Control | Off |
| S3-8 | Anti-stream Control | Off |

Switches S3-1 & S3-2: Input Impedance

The setting for Switches S3-1 and S3-2 determines the 1080A Series' input impedance. This allows you to choose the optimum impedance setting for your application. In long distance applications the impedance of the cable must match the impedance of the load (or resistor) of the Model 1080A Series unit. Thicker gauge cables requires a lower Ohm setting, while a thinner gauge cable should receive a higher Ohm setting. If you are using higher speeds you will need a lower Ohm setting, and a higher Ohm setting for the slower speeds. Refer to the table on the following page for assistance in selecting a setting.

| S3-1 | S3-2 | Setting |
|------|------|------------------------------|
| On | On | 130 Ohms |
| On | Off | 200 Ohms |
| Off | On | 320 Ohms |
| Off | Off | High impedance (minimum 2kΩ) |

S3-1, S3-2 SELECTION TABLE FOR MODEL 1080A

| Gauge of Cable | Data Rates, kb/s | | | | | | | | | | | |
|----------------|------------------|-----|-----|-----|-----|-----|-----|------|------|------|------|------|
| | 1.2 | 1.8 | 2.4 | 3.6 | 4.8 | 7.2 | 9.6 | 14.4 | 19.2 | 28.8 | 38.4 | 57.6 |
| 19AWG/.9mm | 320 | 320 | 200 | 200 | 200 | 200 | 200 | 130 | 130 | 130 | 130 | 130 |
| 22AWG/.6mm | 320 | 320 | 320 | 200 | 200 | 200 | 200 | 200 | 130 | 130 | 130 | 130 |
| 24AWG/.5mm | 320 | 320 | 320 | 320 | 200 | 200 | 200 | 200 | 200 | 130 | 130 | 130 |
| 26AWG/.4mm | 320 | 320 | 320 | 320 | 320 | 200 | 200 | 200 | 200 | 200 | 130 | 130 |

S3-1, S3-2 SELECTION TABLE FOR MODEL 1080A-64

| Gauge of Cable | Data Rates, kb/s | | |
|----------------|------------------|-----|-----|
| | 16 | 32 | 64 |
| 19AWG/.9mm | 130 | 130 | 130 |
| 22AWG/.6mm | 200 | 130 | 130 |
| 24AWG/.5mm | 200 | 130 | 130 |
| 26AWG/.4mm | 200 | 200 | 130 |

Switch S3-4: Mode Selection

The setting for switch S3-4 allows the user to choose the appropriate setting for point-to-point or multipoint applications.

| S3-4 | Setting |
|------|------------------------------------|
| On | Point-to-point |
| On | Multipoint application as “Master” |
| Off | Multipoint application as “Slave” |

Switch S3-5: RS-232 Initiation of Local Loopback Test

The setting for switch S3-5 determines whether or not the Model 1080A Series' local analog loopback test can be initiated by raising pin 18 on the RS-232 interface.

| S3-5 | Setting |
|------|----------------------------|
| On | RS-232 initiation enabled |
| Off | RS-232 initiation disabled |

4.0 INSTALLATION

Switch S3-6: RS-232 Initiation of Remote Loopback Test

The setting for switch S3-6 determines whether or not the Model 1080A Series' remote digital loopback test can be initiated by raising pin 21 on the RS-232 interface.

| <u>S3-6</u> | <u>Setting</u> |
|-------------|----------------------------|
| On | RS-232 initiation enabled |
| Off | RS-232 initiation disabled |

Switches S3-7 and S3-8: Anti-stream Control

Switches S3-7 and S3-8 are set in combination to determine the time out period for the Model 1080A Series' anti-stream control timer.

| <u>S3-7</u> | <u>S3-8</u> | <u>Setting</u> |
|-------------|-------------|----------------|
| Off | Off | Disabled |
| Off | On | 12.5 seconds |
| On | Off | 50.0 seconds |
| On | On | 12.5 seconds |

The Model 1080A Series operates in four twisted pair topologies: 2-wire/point-to-point, 2-wire/multipoint, 4-wire/point-to-point, and 4-wire/multipoint. In each of these topologies, the twisted pair wire must be 19 - 26 AWG "dry", unconditioned metallic wire (see Appendix C for wire recommendations). Dial-up analog circuits, such as those used with a standard Hayes-type modem, are not acceptable. The twisted pair may be shielded or unshielded. Both types yield favorable results.

The Model 1080A Series offers two methods of twisted pair connection: RJ-45 jack and terminal blocks. Figure 3 (below) shows the location of these interfaces on the rear panel of the Model 1080A Series. Connect the wire to each Model 1080A Series as described in the instructions that follow the illustration. The "+" and "-" indicators are for reference only. The Model 1080A Series is not sensitive to polarity.

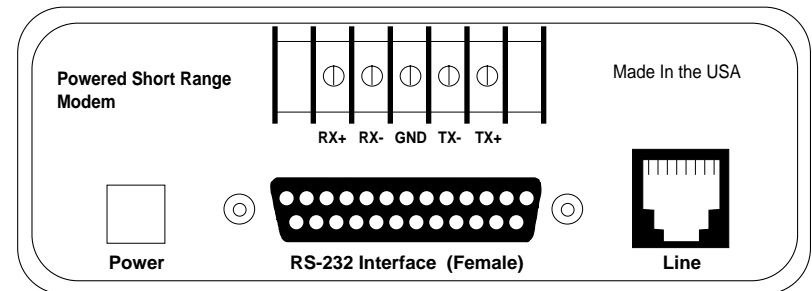


Figure 3. Rear view of Model 1080A Series

4.1 TWO-WIRE INSTALLATION

When communicating over a single twisted pair circuit, the Model 1080A Series operates half duplex: that is, it transmits in only one direction at a time. This method of operation is effective for both point-to-point and multipoint applications.

In single pair point-to-point applications, you will need a pair of Model 1080A or 1080A-64s for each circuit—one at each end of the single pair wire. In single-pair multipoint applications you will need three or more Model 1080A Series units. These can be connected using a star topology, although a daisy chain topology is usually used.

4.1.1 Two-Wire Cable Connection Via RJ-45

A. The RJ-45 jack on a Model 1080A Series Short Range Modem is prewired for a standard TELCO wiring environment. To be sure you have the right wiring, use the table below as a guide.

| <u>RJ-45</u> | <u>SIGNAL</u> |
|--------------|------------------|
| 1 ----- | NC |
| 2 ----- | GND [†] |
| 3 ----- | RCV |
| 4 ----- | XMT |
| 5 ----- | XMT |
| 6 ----- | RCV |
| 7 ----- | GND |
| 8 ----- | NC |


[†]Connection to ground is optional

B. Proper wiring of pairs between the two modems is as follows:

| <u>SIGNAL</u> | <u>PIN#</u> | <u>COLOR*</u> | <u>COLOR</u> | <u>PIN#</u> | <u>SIGNAL</u> |
|---------------|-------------|---------------|--------------|-------------|---------------|
| XMT | 4 | Green ----- | Green | 4 | XMT |
| XMT | 5 | Red ----- | Red | 5 | XMT |

*Standard color codes—yours may be different


C. AT&T standard modular color codes:



4.1.2 Two-Wire Cable Connection Via Terminal Blocks

If you are not going to use the modular jacks, follow the instructions below.

A. Locate the terminal block on the back of the unit. It should look like the following diagram:




NOTE: * The "+" and "-" indicators are for reference only. The Model 1080A Series is not sensitive to polarity.

B. Connect one wire of the pair to a Transmit lug (TX+ or TX-) on both the local and remote Model 1080A or 1080A-64.

C. Connect the other wire of the pair to the other Transmit lug on both the local and remote Model 1080A or 1080A/64.

D. If there is a shield around the telephone cable, it may be connected to GND on the terminal block. We recommend connecting the shield at the computer end only to avoid ground loops. A ground wire is not necessary for proper operation of these units.

E. When you finish connecting the telephone line to units at both ends, it should look like the following diagram:



4.2 FOUR-WIRE INSTALLATION

When communicating over a two twisted pair circuit, the Model Series can operate full or half duplex, point-to-point or multipoint. In two pair point-to-point applications, you will need a *pair* of Model 1080As or 1080A-64s for each circuit—one at *each end* of the single pair wire. In two pair multipoint applications you will need three or more Model 1080A Series units.. These can be connected using a star topology, although a daisy chain topology is usually used.

4.2.1 Four-Wire Cable Connection Via RJ-45

A. The RJ-45 jack on a Model 1080A/1080A-64 Short Range Modem is prewired for a standard TELCO wiring environment. To be sure you have the right wiring, use the table below as a guide.

| <u>RJ-45</u> | <u>SIGNAL</u> |
|--------------|------------------|
| 1 ----- | NC |
| 2 ----- | GND [†] |
| 3 ----- | RCV |
| 4 ----- | XMT |
| 5 ----- | XMT |
| 6 ----- | RCV |
| 7 ----- | GND |
| 8 ----- | NC |

B. Proper crossing of pairs between the two modems is as follows:


[†]Connection to ground is optional

| <u>SIGNAL</u> | <u>PIN#</u> | <u>COLOR*</u> | <u>COLOR</u> | <u>PIN#</u> | <u>SIGNAL</u> |
|------------------|-------------|---------------|--------------|-------------|---------------|
| GND [†] | 2 | Orange ----- | Brown | 7 | GND |
| RCV | 3 | Black ----- | Green | 5 | XMT |
| XMT | 4 | Red ----- | Yellow | 6 | RCV |
| XMT | 5 | Green ----- | Black | 3 | RCV |
| RCV | 6 | Yellow ----- | Red | 4 | XMT |
| GND | 7 | Brown ----- | Orange | 2 | GND |

*Standard color codes—yours may be different

[†]Connection to ground is optional


C. AT&T standard modular color codes:



4.2.2 Four-Wire Cable Connection Via Terminal Blocks

If you are not going to use the modular jacks then follow the instructions below.

A. Locate the terminal block on the back of the unit. It should look like the following diagram:




* The "+" and "-" indicators are for reference only. The Model 1080A Series is not sensitive to polarity.

B. Connect one pair of wires in the telephone cable to the Transmit lugs (TX+ and TX-) on the terminal block.

C. Connect the other pair of wires in the telephone cable to the Receive lugs (RX+ and RX-) on the terminal block.

D. If there is a shield around the telephone cable, it may be connected to "G" on the terminal block. We recommend connecting the shield at the computer end only to avoid ground loops. A ground wire is not necessary for proper operation of these units.

E. When you finish connecting the telephone line to units at both ends, it should look like the following diagram:

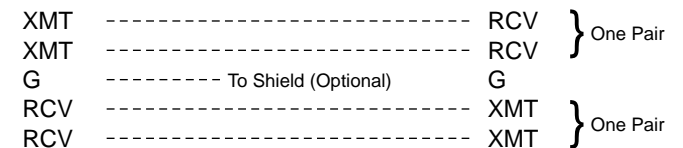

4.3 FOUR-WIRE, MULTIPOINT INSTALLATION

Multipoint operation involves the connection of several terminals to one host port. In such an application, one local Model 1080A/1080A-64 is used as a master unit, and it is connected to several remote Model 1080A/1080A-64s that are acting as slaves. Up to 25 Model 1080A Series slaves may be connected to one host Model 1080A Series master SRM, provided that the computing hardware and software support that many terminal drops.

In a multipoint environment the master Model 1080A or 1080A-64 transmits continually. Initiation of two-way communication is carrier-controlled by each "slave" Model 1080A Series unit. To facilitate multipoint communication, the master Model 1080A-64 should have its carrier control DIP switch set to "constantly ON" (S1-8=OFF). Each slave Model 1080A Series unit should have its carrier control DIP switch set to "controlled by RTS" (S1-8=ON). Figure 4 illustrates a typical Model 1080A Series multipoint application.



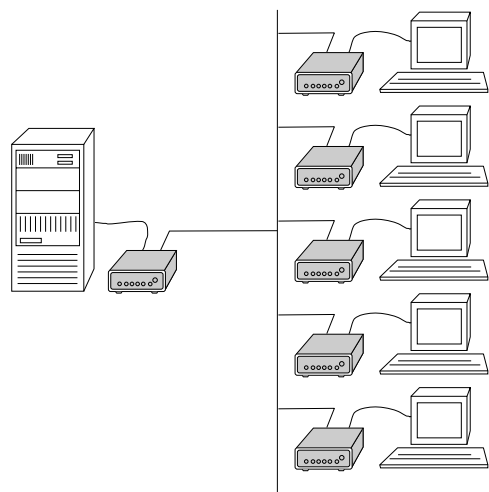


Figure 4. Typical multipoint set-up

4.3.1 Multipoint Twisted Pair Connection

The Model 1080A Series supports multipoint applications using a star topology. Maximum distance between the units will vary based upon the number of drops, data rate, wire gauge, etc. Call Patton Technical Support for specific distance estimates. Figures 11 and 12 show how to wire the one-pair and two-pair cables properly for a Model star topology. Note that the ground connection is not needed.

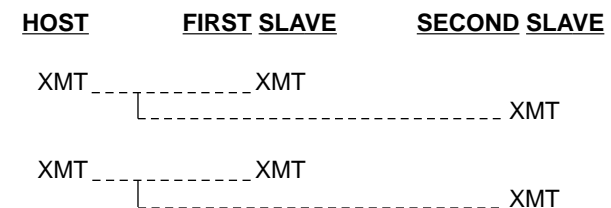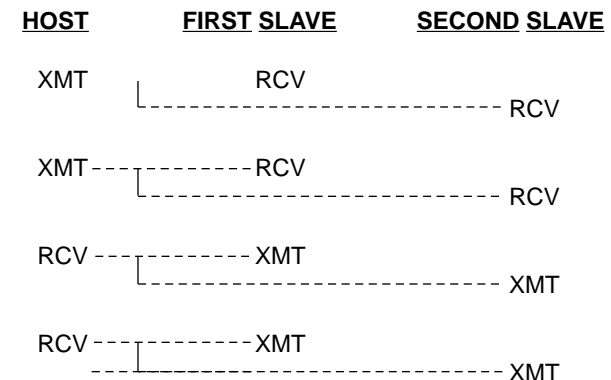

4.4 RS-232 CONNECTION

Connect the synchronous or asynchronous output of your RS-232 device to the DB-25 interface on the rear panel of the Model 1080A Series. Note: The Model 1080A Series is wired to connect to a DTE. If your RS-232 output device is DCE, call Patton Technical Support at: (301) 975-1007; <http://www.patton.com>; or, support@patton.com for specific installation instructions.

5.0 OPERATION

Once you have configured each Model 1080A Series unit properly and connected the twisted pair and RS-232 cables (see Section 4.0), you are ready to operate the units. This section describes reading the LED status monitors, powering-up and using the built-in V.52 and V.54 test modes.

5.1 LED STATUS MONITORS

The Model 1080A Series features six front panel status LEDs that indicate the condition of the modem and communication link. Figure 5 shows the front panel location of each LED. Following Figure 5 is a description of each LED's function.

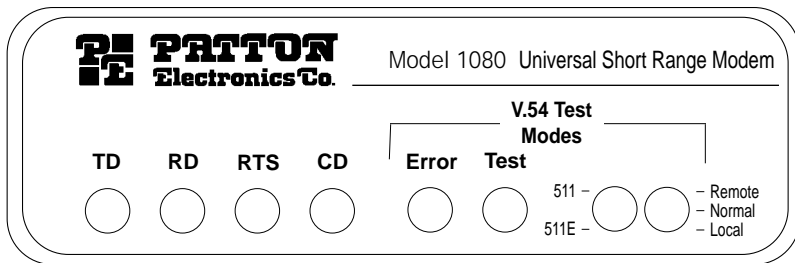


Figure 5. Front view of Model 1080A Series

5.1.1 The “TD” and “RD” Indicators

The “TD” and “RD” indicators blink red and green with data activity. Red indicates a low RS-232 logic level, green indicates a high RS-232 logic level. Note: RS-232 devices idle in a *low* state, so the LED will glow red if the connections are correct and the RS-232 device is in an idle state.

5.1.2 The “RTS” and “CD” Indicators

The “RTS” and “CD” indicators are bi-color and will glow red for a “low” signal or green for a “high” signal. RTS lights for an incoming signal on RS-232 pin 4. CD lights for an incoming signal on the line side, and the resulting output signal on RS-232 pin 8.

5.1.3 The “Test” Indicator

The green “Test” LED indicates that V.52 or V.54 tests are running.

5.1.4 The “Error” Indicators

The “Error” indicator LED has three functions:

A. When the 1080A Series unit is in test mode (green “Test” LED is lit), the error LED glows red when bit errors occur.

B. When not in test mode (green “Test” LED is off), the error LED is used to indicate an RTS streaming condition. (See Section 5.2) for information on the anti-streaming circuitry.

C. The “Error” LED is also used to detect line quality, such:

1. The improper use of flat (non-twisted pair) cable to connect the modems.
2. One or more broken wire in the 4 wire twisted pair cable.
3. The use of low quality twisted pair cable to connect the modems.
4. Broken or corroded connector.

NOTE: In detecting line quality the “Error” LED indicator is designed for 4 wire twisted pair cable only, and may not function properly with two wire cable.

5.1.4.1 Setting Up The “Error” LED To Test Cable Quality

If there is any question as to the quality of your line we recommend the following test:

1. Disconnect both local and remote modems from their RS-232 interface. Make sure “TD”, “RD” and “RTS” LEDs are lit red.
2. Set input impedance of both modems to 200Ω. (S3-1 “On”, S3-2 “Off”). **NOTE:** When testing Model 1080A-64, use 22AWG, 24AWG, or 26AWG cable only,
3. For Model **1080A**, set data rate on both modems for **9.6kbps**. For Model **1080A-64**, set data rate on both modems at **16 kbps**.
4. On local modem set “Carrier Constantly On”. (S1-8 “Off”)
5. Set remote modem to RTS control (S1-8, “On”).
6. Place both front panel toggle switches to neutral position. (Test Led will not light)
7. Connect both modems to the 4 wire twisted pair cable.

5.1.4.2 Reading The Test

A. If line quality is good, "Error" LED on local modem will not light and "CD" LED will be red. On remote modem "Error" LED will not light and "CD" LED will light green.

B. If flat cable is used or parts of the line are flat cable, "Error" LED on local modem will light red and "CD" LED will light green. On remote modem "Error" LED will not light and "CD" LED will light green.

C. If one wire from the 4 wire twisted pair is broken "Error" LED will light red and "CD" LED will light green on at least one modem.

Note: We cannot guarantee accurate detection if small pieces of flat cable are present in the line beyond 1500ft of the local modem.

5.2 ANTI-STREAMING ERROR INDICATOR

When not in test mode (green "Test" LED is off), the front panel "Error" LED is used to indicate a streaming error. When the Model 1080A Series' anti-streaming circuitry is enabled, the RTS signal from the DTE is timer controlled. The timer begins to count when the DTE raises RTS. If the time period that RTS remains high exceeds the preset time out period, the anti-stream circuit will force RTS low. The "Error" LED will light red, indicating a streaming condition (RTS continually on). This feature prevents a malfunctioning terminal from tying-up a computer port in a multi-drop or polling environment. When the DTE drops RTS, the anti-streaming timer is automatically reset and the front panel "Error" LED turns off. The time out period is DIP switch selectable for 12.5 or 50 seconds.

5.3 POWER-UP

Apply AC power to the Model 1080A Series by plugging the separate AC power adapter first into the rear panel of the Model 1080A/1080A-64, and then into an acceptable AC power outlet. There is no power switch on the Model 1080A/1080A-64; and the remote/normal/loopback switch should be set to "normal". When the local and remote Model 1080A/1080A-64s are *both* powered up, and passing data *normally*, the following LED conditions will exist:

- TD & RD = flashing red and green
- RTS & DCD = green
- TEST = off

5.4 V.54 TEST MODES

The Model Series offers two V.54 test modes to evaluate the condition of the modems and the communication link. These tests can be activated physically from the front panel, or via the RS-232 interface. Note: V.54 test modes are available for point-to-point applications only.

5.4.1 Local Analog Loopback (LAL)

The Local Analog Loopback (LAL) test checks the operation of the local Model 1080A Series unit, and is performed separately on each unit. Any data sent to the local Model 1080A or 1080A-64 in this test mode will be echoed (returned) back to the user device. For example, characters typed on the keyboard of a terminal will appear on the terminal screen. To perform a LAL test, follow these steps:

A. Activate LAL. This may be done in one of two ways: First, by moving the front panel toggle switch DOWN to "Local". Second, by raising pin 18 on the RS-232 interface (Note: Make sure DIP switch S2-6 is OFF, and DIP switch S3-5 is ON). Once LAL is activated, the Model 1080A Series' transmit output is connected to its own receiver. The "test" LED should be lit.

B. Verify that the data terminal equipment is operating properly and can be used for a test. If a fault is indicated, call a technician or replace the unit.

C. Perform a BER (bit error rate) test on each unit. If the BER test equipment indicates no faults, but the data terminal indicates a fault, follow the manufacturer's checkout procedures for the data terminal. Also, check the RS-232 interface cable between the terminal and the Model 1080A/1080A-64.

5.4.2 Remote Digital Loopback (RDL)

The Remote Digital Loopback (RDL) test checks the performance of both the local and remote Model 1080A/1080A-64s, *and* the communication link between them. Any characters sent to the remote 1080A or 1080A-64 in this test mode will be returned back to the originating device. For example, characters typed on the keyboard of the local terminal will appear on the local terminal screen *after* having been passed to the remote Model 1080A/1080A-64 and looped back. To perform an RDL test, follow these steps:

A. Activate RDL. This may be done in two ways: First, by moving the front panel toggle switch UP to "Remote". Second, by raising pin 21 on the RS-232 interface (Note: Make sure DIP switch S3-6 is ON; and DIP switch S2-6 is OFF).

B. Perform a BER (bit error rate) test on the system.

C. If the BER test equipment indicates a fault, and the Local Analog Loopback test was successful for both Model 1080A Series units, you may have a problem with the twisted pair line between the modems. You should then test the twisted pair line for proper connections and continuity.

5.4.3 Using the V.52 BER Test Independently

The V.52 BER test can be used independently of the V.54 loopback tests. This requires two operators: one to initiate and monitor the test at the local 1080A/1080A-64, and one at the remote 1080A/1080A-64. To use the V.52 BER test by itself, both operators should simultaneously follow these steps:

1. Locate the "511/511E" toggle switch on the front panel of the unit and move it UP. This activates the V.52 BER test mode and transmits a "511" test pattern to the other unit. If any errors are present, the receiving modem's red "ERROR" LED will blink sporadically. Note: For this test to function, the "511" switch on both 1080A Series units must be on.
2. If the test indicates no errors are present, move the V.52 toggle switch DOWN, activating the "511/E" test with periodic errors present. If the test is working properly, the receiving modem's red "ERROR" LED will blink *regularly*. A successful "511/E" test will confirm that the link is in place, and that the Model 1080A Series' built-in "511" generator and detector are working properly.

5.5 POWER-DOWN

Turn off the Model 1080A Series by simply unplugging the AC power adapter from the wall. There is no power switch.

PATTON MODEL 1080A SERIES SPECIFICATIONS

| | |
|-------------------------------|---|
| Transmission Format: | Synchronous or asynchronous, 2-wire/half duplex, or 4-wire/full or half duplex |
| Interface: | RS-232 (CCITT V.24) connection via DB-25 female; twisted pair connection via RJ-45 or terminal block |
| Transmission Line: | 2 or 4-wire UTP, 19 - 24 AWG |
| Data Rates: | Model 1080A - Synchronous or asynchronous at 1.2, 1.8, 2.4, 3.6, 4.8, 7.2, 9.6, 14.4, 19.2, 28.8, 38.4, and 57.6 kbps—switch selectable; Model 1080A-64 - Synchronous or asynchronous at 16, 32, and 64 kbps—switch selectable |
| Clocking: | Internal, external or receive recover |
| Controls: | Carrier constantly "ON" or "controlled by RTS"; RTS/CTS delay set to no delay, 7 or 53 ms |
| Applications: | Point-to-point or multi-point |
| Indicators: | Bi-color LED indicators for TD, RD, RTS & DCD; single LED indicators for Test and Error |
| RTS Anti-stream Timer | 12.5 sec., 50 sec., or disabled (switch selectable); tolerance: +50%, -0 |
| Diagnostics: | V.52 compliant bit error rate pattern (511/511E pattern) generator and detector with error injection mode; V.54 compliant—Local Analog Loopback and Remote Digital Loopback, activated by front panel switch or via RS-232 interface |
| Transformer Isolation: | 1500 V RMS |
| Surge Protection: | Immune to IEC-801-5 Level 2, 1kV |
| Temperature: | 0-50°C / 32-122°F |
| Humidity: | 0-95%, non-condensing |
| Dimensions: | 6.2"w x 4.2"h x 1.5"l |
| Power Supply (US): | Wall-mount; input: 120 V AC; output: 10-12 V AC |

APPENDIX B

PATTON MODEL 1080A SERIES FACTORY REPLACEMENT PARTS AND ACCESSORIES

| <u>Patton Model #</u> | <u>Description</u> |
|-----------------------|---------------------------------|
| 080510ACB | 120V Wall Mount AC Adapter |
| 08059ACI | 230V AC Adapter (No Power Cord) |
| 07M1080A | Model 1080A Series User Manual |

APPENDIX C

PATTON MODEL 1080A SERIES CABLE RECOMMENDATIONS

All Patton Electronics Company Short Range Modems are tested to the distances published in our Catalogs and Specification Sheets on twisted-pair cable with the following characteristics:

| <u>Wire Gauge</u> | <u>Capacitance</u> | <u>Resistance</u> |
|-------------------|-------------------------|-------------------|
| 19 AWG(.9mm) | 83nF/mi or 15.72 pF/ft. | .0163Ω/ft. |
| 22 AWG(.6mm) | 83nF/mi or 15.72 pF/ft. | .0326Ω/ft. |
| 24 AWG(.5mm) | 83nF/mi or 15.72 pF/ft. | .05165Ω/ft. |
| 26 AWG(.4mm) | 83nF/mi or 15.72 pF/ft. | .08235Ω/ft. |

We fully expect that the Short Range Modems will operate on lines with specifications different from those tested, but to reduce the potential difficulties in the field, one should ensure that the cable being used has similar or better characteristics (lower capacitance or lower resistance).

Wire with capacitance of 20pF/ft. or less is suitable for all our Short Range Modems however, distances may vary from those published in our catalog. Resistance will also affect distance but not functionality. Wire should be 26 AWG (.4mm) or larger (smaller AWG#).

Patton products are designed to withstand normal environmental noise and conditions however, other environmental factors too numerous to discuss in this format may affect proper operation of the SRM's.

Selection of the proper SRM for an application is critical to maintaining Customer Satisfaction and should be taken seriously. Certain models are better suited for particular applications and environments than others.

| Model 1080A Distance Table in miles (km) | | | | |
|--|---------------------|------------|------------|-----------|
| Data Rate (bps) | AWG Wire Gauge (mm) | | | |
| | 19 (.9) | 22 (.6) | 24 (.5) | 26 (.4) |
| 57,600 | 12.0(19.3) | 7.0(11.2) | 5.3(8.5) | 4.0(6.4) |
| 38,400 | 13.0(20.9) | 7.5(12.1) | 6.2(10.0) | 4.2(6.8) |
| 28,800 | 14.0(22.5) | 8.0(12.9) | 6.6(10.6) | 4.6(7.4) |
| 19,200 | 16.0(25.8) | 8.5(13.7) | 7.0(11.3) | 5.1(8.2) |
| 14,400 | 17.0(27.4) | 11.0(17.7) | 9.2(14.9) | 6.5(10.5) |
| 9,600 | 18.5(29.8) | 13.0(20.9) | 10.4(16.7) | 7.5(12.1) |
| 7,200 | 19.0(30.6) | 13.5(21.7) | 10.9(17.5) | 8.0(12.9) |
| 4,800 | 19.5(31.4) | 14.0(22.5) | 11.3(18.2) | 8.8(14.2) |
| 3,600 | 20.0(32.2) | 14.5(23.3) | 11.5(18.5) | 8.8(14.2) |
| 2,400 | 20.5(33.0) | 15.0(24.2) | 11.6(18.7) | 9.0(14.5) |
| 1,800 | 20.5(33.0) | 15.0(24.2) | 11.5(18.5) | 8.9(14.3) |
| 1,200 | 20.0(32.2) | 15.0(24.2) | 11.4(18.4) | 8.9(14.3) |


| Model 1080A-64 Distance Table in miles (km) | | | | |
|---|---------------------|------------|-----------|----------|
| Data Rate (bps) | AWG Wire Gauge (mm) | | | |
| | 19 (.9) | 22 (.6) | 24 (.5) | 26 (.4) |
| 64,000 | 11.0(17.7) | 6.5(10.5) | 5.0(8.1) | 3.8(6.1) |
| 32,000 | 13.5(21.7) | 7.5(12.1) | 6.4(10.3) | 4.4(7.1) |
| 16,000 | 16.5(26.6) | 10.0(16.1) | 8.4(13.5) | 6.0(9.6) |

APPENDIX D

PATTON MODEL 1080A SERIES BLOCK DIAGRAM

PATTON MODEL 1080A SERIES BLOCK DIAGRAM

| DIRECTION | STANDARD RS-232C/V.24 "DCE" SETTING | DIRECTION |
|----------------------|---|--|
| To 1080A | <div> <div> <div>1- (FG) Frame Ground</div> <div>2- (TD) Transmit Data</div> <div>3- (RD) Receive Data</div> <div>4- (RTS) Request to Send</div> <div>5- (CTS) Clear to Send</div> <div>6- (DSR) Data Set Ready</div> <div>7- (SG) Signal Ground</div> <div>8- (DCD) Data Carrier Detect</div> </div> <div> <div>Analog Loop - 18</div> <div>Data Term. Ready (DTR) - 20</div> <div>Digital Loop - 21</div> <div>Test Mode - 25</div> </div> </div> | <div> <div>To 1080A</div> <div>From 1080A</div> <div>To 1080A</div> <div>From 1080A</div> <div>From 1080A</div> </div> |
| To 1080A To 1080A | | From 1080A |
| From 1080A | | |

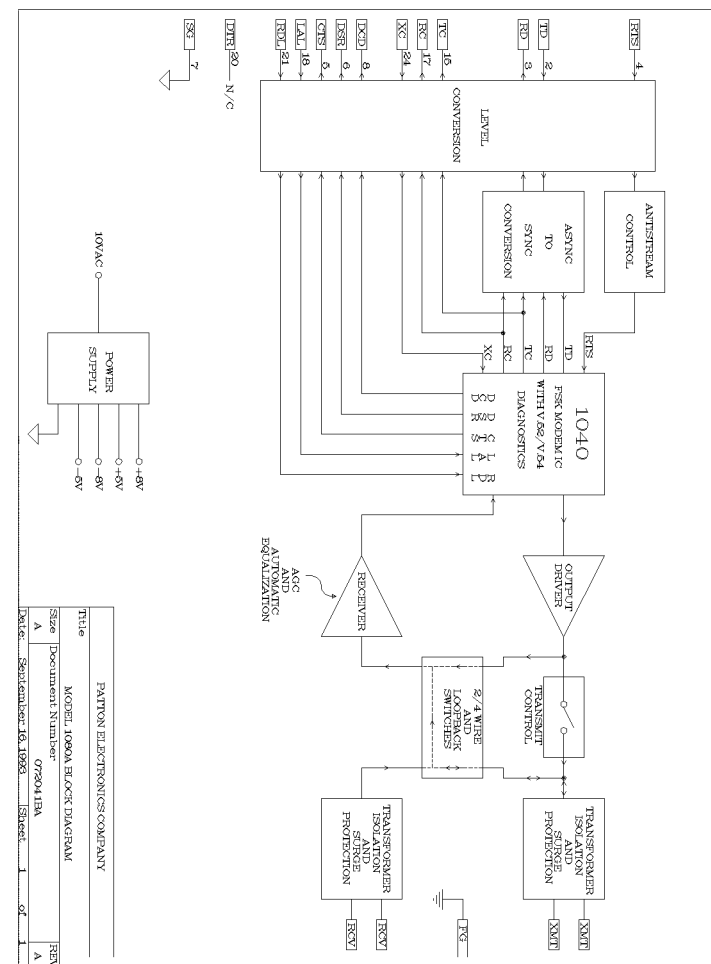

**Copyright © 1998
Patton Electronics Company
All Rights Reserved**